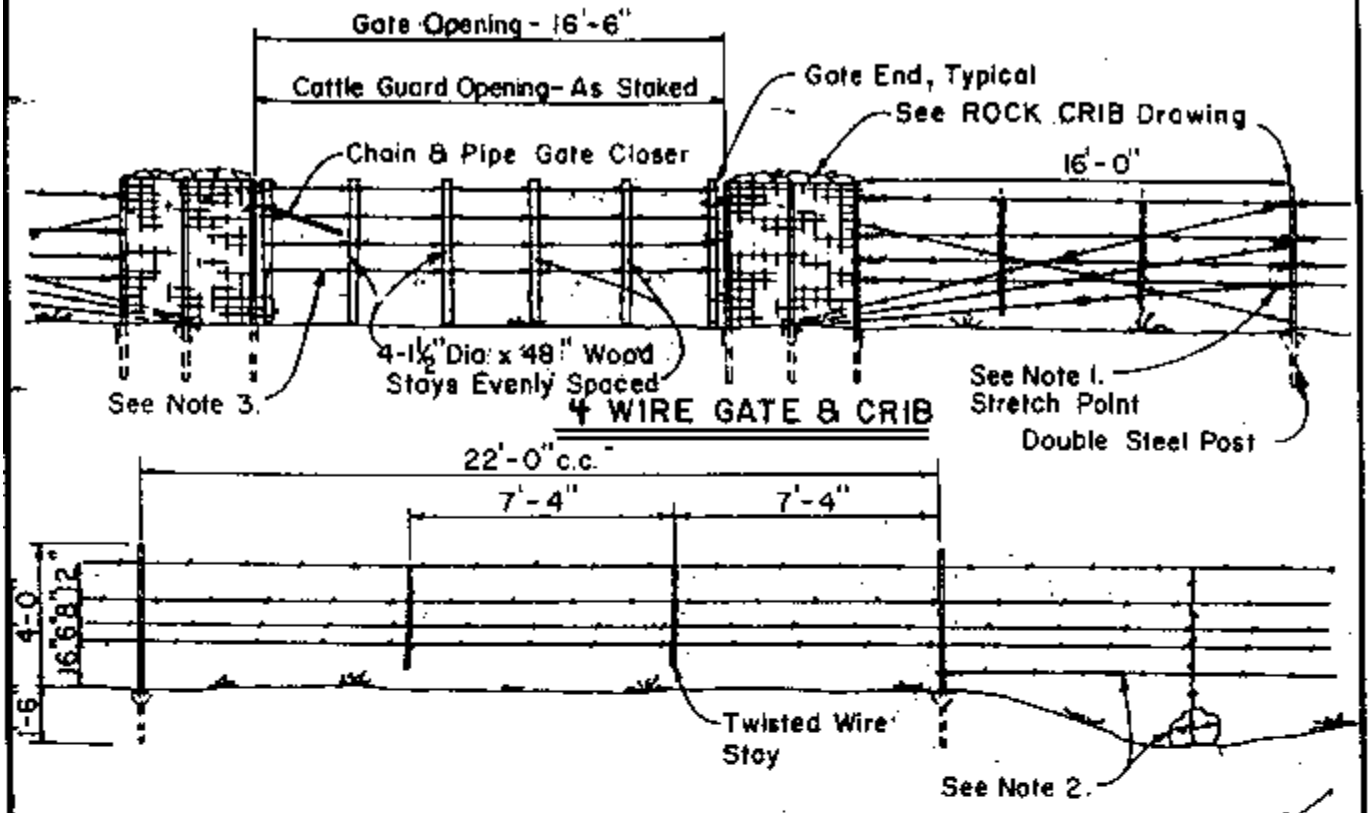

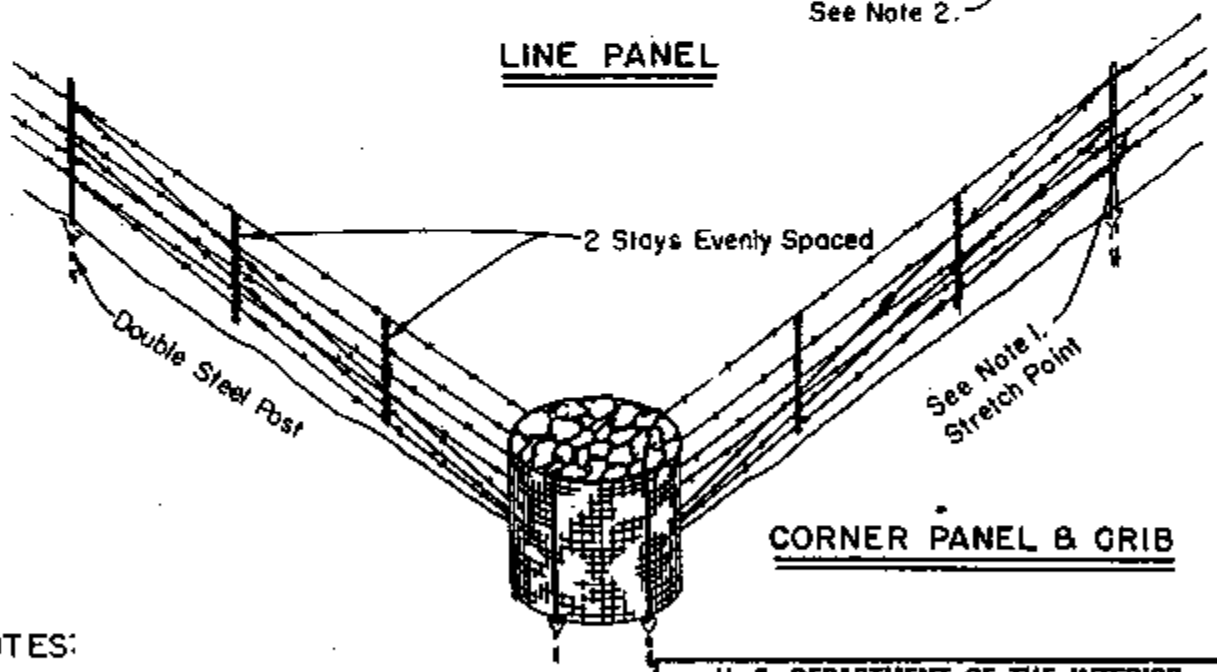

NOTES:

1. Wires To Be Tied Off At Stretch Points; Wrap And Splice To Self With At Least 4 Turns.
2. Add Additional Strands Of Barbed Wire And/Or A Rock Deadman (Min. 50 Lbs.) When Space Between Bottom Wire And Ground Exceeds 20 In.
3. 4 Wires Evenly Spaced. Top Wire 45" From Ground. Bottom Wire 9" From Ground.

U. S. DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ALL STEEL - TYPE D FENCE
4 WIRE FENCELINE

DESIGNED DH	RECOMM.
DRAWN DH	RECOMM. CHIEF, DIV. OF ENG.
CHECKED DG	APPROVED
SCALE NONE	
DATE 3-2-83	SHEET 1 OF 1
DRAWING NO.	